

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **88300686.8**

(51) Int. Cl. 4: **H 04 R 1/22**

(22) Date of filing: **27.01.88**

BEST AVAILABLE COPY

(30) Priority: **29.01.87 GB 8702037**

(43) Date of publication of application:
03.08.88 Bulletin 88/31

(84) Designated Contracting States: **AT DE FR IT SE**

(71) Applicant: **CRYSTALATE ELECTRONICS LIMITED**
Wharf House Medway Wharf Road
Tonbridge Kent TN9 1RE (GB)

(72) Inventor: **Groves, Ronald John**
29 Laughton Road Woodingdean
Brighton Sussex BN2 6QF (GB)

Lambell, Keith Trevor
125 The Avenue Aylesford
Maldstone Kent ME20 7RQ (GB)

(74) Representative: **Cole, Paul Gilbert et al**
HUGHES CLARK & CO. 63 Lincoln's Inn Fields
London WC2A 3JU (GB)

(54) **Microphone.**

(57) A noise cancelling microphone (2) for location inside an apertured mouthpiece region (1) of a telephone handset comprises a housing (4) with a face (5) for securement in contact with the inside of the mouthpiece region (1). A cavity (6) accommodates a vibratable diaphragm (9). A first sound path is provided to a front surface (10) of the diaphragm (9) by way of an opening (8) in a central region of the face (5) of the housing and apertures (14) in a central portion of the mouthpiece region (1) of the handset. A second sound path, physically separated from the first, is provided to a rear surface (13) of the diaphragm by way of an opening (12) in an outer region of the face (5) of the housing and apertures (15) in an outer portion of the mouthpiece region (1). The separated sound paths are extended by securing an upstanding member (17), such as a hollow truncated cone, externally on the mouthpiece region (1) to separate the central (14) and outer (15) apertures.

EP 0 276 996 A2

Description

MICROPHONE

This invention relates to microphones and more particularly to a noise cancelling microphone for use with a telephone handset which has been designed to accommodate an internally mounted microphone without noise cancelling facility.

Telephones having microphones fitted inside an apertured mouthpiece usually have no discrimination against background noise. Noise cancelling microphones are well known. They are sometimes also referred to as pressure gradient microphones and in their construction a vibratable diaphragm which is actuated by speech or other sounds is arranged such that sound paths are provided to both front and rear sides thereof to reduce the effect of unwanted background noise signals. Prior art microphones of this type are unsuitable to serve as direct replacements for conventional microphones inside the mouthpiece of telephone handsets because they are not adapted to work with existing apertures in the handset mouthpiece.

One solution to this problem is described in British Patent Application No. 8500854, Publication No. GB 2169774A. In this application, a noise cancelling microphone arrangement is disclosed which is constructed and arranged for securing to the external surface of the apertured mouthpiece region of a telephone handset without requiring modification to the handset.

It is an object of the present invention to provide a noise cancelling microphone for use inside the mouthpiece of an existing telephone handset without requiring modification to the handset.

The present invention provides a noise cancelling microphone for location inside a telephone handset at an internal surface of an apertured mouthpiece region thereof and incorporating a diaphragm and associated essential components for converting sound energy into electrical signals for transmission, said microphone comprising:

a housing having a face adapted to be secured in contact with the internal surface of the apertured mouthpiece region of the handset;
a cavity formed within the housing and accommodating the said diaphragm, said diaphragm being secured at its periphery inside the cavity;
a first sound path provided to a front surface of the diaphragm by way of an opening in a central region of said face of said housing;
a second sound path provided to a rear surface of the diaphragm by way of an opening in an outer region of said face of said housing, said first and second sound paths being physically separated from one another;

said microphone being adapted to be secured in contact with the internal surface of the apertured mouthpiece region of the handset such that one or more apertures in a central portion of the apertured mouthpiece region overlies and access the said opening in the central region of the said face of the housing and such that one or more apertures in an outer portion of the apertured mouthpiece region

overlies and access the said opening in the outer region of the said face of the housing.

By means of the invention, separated sound paths are provided from the exterior of the mouthpiece region of the handset to the front and rear surfaces of the diaphragm. The separated sound paths to the diaphragm may be extended by providing, for securement externally on the apertured mouthpiece region of the handset, one or more upstanding members adapted to separate the said central portion of the apertured mouthpiece of the handset from the said outer portion of the apertured mouthpiece region of the handset. One such upstanding member may, for example, comprise an open-ended hollow member arranged to surround the central portion of the apertured mouthpiece region of the handset. Where the apertures in the mouthpiece region are arranged in concentric circular pattern, the open-ended hollow member may conveniently be provided of cylindrical form, or in the form of a truncated cone whose truncated apex region is arranged to be secured to the mouthpiece region of the handset.

Alternatively, where the apertures in the mouthpiece region are in rectangular arrangement, an upstanding member of open-ended hollow rectangular form may be provided, or two or more wing-like members may be provided, extending from the external surface of the apertured mouthpiece region of the handset to separate the central and outer apertured regions.

The microphone is suitably adapted to be secured in contact with the internal surface of the apertured mouthpiece region of the handset by an adhesive or by clamping means.

Such clamping means may conveniently comprise one or more clips or threaded fasteners. If one or more threaded fasteners are employed, this or these may conveniently be passed through one or more of the apertures in the apertured mouthpiece region of the handset.

If required, a seal of a suitably shaped compliant material, such as a rubber or plastics material, may be provided between the microphone and the apertured mouthpiece region of the handset.

The said cavity is conveniently of hollow cylindrical form and suitably located concentrically with the housing, which may also conveniently be substantially cylindrical in shape.

The present invention also provides a telephone handset incorporating a noise cancelling microphone as described hereinbefore.

The invention is now described by way of example with reference to the accompanying drawing which represents a cross-sectional view of an apertured mouthpiece region of a telephone handset to which is secured a noise-cancelling microphone according to the invention. In the drawing, certain electrical and mechanical components of the microphone have been omitted in the interest of clarity. Such components, although being essential to the basic

operation of the microphone, are well-known in the art and not required for an understanding of the invention.

A telephone handset of conventional construction incorporates an apertured mouthpiece region 1 of known form. A noise cancelling microphone 2 is provided for mounting inside the handset and for securing in contact with the internal surface 3 of the apertured mouthpiece region 1. The microphone 2 comprises a housing 4, e.g., of cylindrical form, having a face 5 shaped to make good contact with the internal surface 3 of the mouthpiece region 1. A cavity 6, of hollow cylindrical form, is provided concentrically with the housing 4. The cavity is open at both ends and has a cylindrical boundary wall 7 extending to an opening 8 provided in a central region of the face 5 of the housing.

A vibratable circular diaphragm 9 of conventional well-known form, is accommodated in the cavity 6 and secured around its periphery directly or indirectly to the cylindrical boundary wall 7. The diaphragm 9 is arranged to be actuated by speech or other sounds applied to the mouthpiece region of the handset. The vibrations of the diaphragm are converted in well-known manner by means (not shown) into electrical signals for transmission from the handset. A first sound path is provided to a front surface 10 of the diaphragm by way of the opening 8 in the face 5 of the housing. A passageway 11 is provided leading from an opening 12 in an outer region of the face 5 of the housing and into the cavity 6 to a rear surface 13 of the diaphragm 9. A second sound path is thereby formed which leads to the rear surface 13 of the diaphragm 9 and is physically separated from the first sound path which leads to the front surface 10 of the diaphragm 9. The microphone 2 is secured in contact with the internal surface 3 of the apertured mouthpiece region of the handset such that apertures 14 in a central portion of the mouthpiece region 1 overlie the opening 8 in the central region of the face 5 of the housing 4 and access the cavity 6 and provide sound paths from the exterior of the mouthpiece region only to the front surface 10 of the diaphragm 9.

Apertures 15 in an outer portion of the mouthpiece region 1 access the passageway 11 in the microphone 2 by way of the opening 12 in the outer region of the face 5 of the housing 4 and provide sound paths only to the rear surface 13 of the diaphragm 9 by way of the passageway 11. The microphone is secured to the handset by suitable means such as a film of adhesive applied at the face 5 of the housing 4. Alternatively, one or more threaded fasteners (not shown) could be used to effect the securement. This or these could conveniently be located through one or more of the apertures 15 in the mouthpiece region 1. As a further alternative, the microphone could be secured in position by means of clips or other convenient clamping means (not shown).

The arrangement results in sound paths to the front and rear surfaces of the diaphragm 9 which are entirely separated. To be fully effective, the face 5 of the microphone housing must be adequately sealed to the internal surface 3 of the mouthpiece region 1.

If necessary a seal (not shown) of a suitably shaped compliant material, such as a rubber or plastics material, can be provided at the interface between the microphone and the mouthpiece region.

The separated sound paths to the diaphragm may be extended by securing to an external surface 16 of the apertured mouthpiece region of the handset an upstanding open-ended hollow member 17 which is arranged to surround the apertures 14 at the central portion of the mouthpiece region of the handset and separate these apertures 14 from the apertures 15 at the outer portion of the mouthpiece region. When the apertures 14, 15 are arranged in concentric circular pattern, the member 17 is suitably provided in the form of a truncated cone and acts as a conical horn. When the handset is in use, the lips of a person speaking into it are close to the open end of the member 17 and a differential pressure is produced at the diaphragm 9 from close speech. Below a limiting frequency, distant sounds produce less differential pressure at the diaphragm and hence there is discrimination against background noise.

The member 17 may be provided of different forms and shapes according to the arrangement of the apertures 14 and 15 in the mouthpiece region 1.

Although it is preferable to provide the member 17, this is not always essential. The spherical form of sound waves produced by a person speaking closely into the mouthpiece of the handset provides a phase-related differential pressure between the apertures 14 in the central portion of the mouthpiece and the apertures 15 in the outer portion of the mouthpiece and limited discrimination can be achieved.

Claims

1. A noise cancelling microphone for location inside a telephone handset at an internal surface of an apertured mouthpiece region (1) thereof and incorporating a diaphragm (9) and associated essential components for converting sound energy into electrical signals for transmission, said microphone comprising:

a housing (4) having a face (5) adapted to be secured in contact with the internal surface (3) of the apertured mouthpiece region (1) of the handset;

a cavity (6) formed within the housing (4) and accommodating the said diaphragm (9), said diaphragm (9) being secured at its periphery inside the cavity (6);

a first sound path provided to a front surface (10) of the diaphragm (9) by way of an opening (8) in a central region of said face of said housing (4);

a second sound path provided to a rear surface (13) of the diaphragm (9) by way of an opening (12) in an outer region of said face of said housing (4), said first and second sound paths being physically separated from one another;

said microphone being adapted to be secured in contact with the internal surface (3) of the apertured mouthpiece region (1) of the handset such that one or more apertures (14) in a central portion of the apertured mouthpiece region (1) overlie and access the said opening (8) in the central region of the said face (5) of the housing (4) and such that one or more apertures (15) in an outer portion of the apertured mouthpiece region (1) overlie and access the said opening (12) in the outer region of the said face (5) of the housing (4).

5

2. A microphone according to Claim 1, in which the separated sound paths to the diaphragm are extended by providing, for securement externally on the apertured mouthpiece region (1) of the handset, one or more upstanding members (17) adapted to separate the said central portion of the apertured mouthpiece region (1) of the handset from the said outer portion of the apertured mouthpiece region (1) of the handset.

10

15

20

3. A microphone according to Claim 2, in which said upstanding member (17) comprises an open-ended hollow member arranged to surround the central portion of the apertured mouthpiece region (1) of the handset.

25

4. A microphone according to Claim 3, in which the apertures (14, 15) in the mouthpiece region (1) are arranged in concentric circular pattern and an open-ended hollow member (17) is provided of cylindrical form, or in the form of a truncated cone whose truncated apex region is arranged to be secured to the mouthpiece region (1) of the handset.

30

35

5. A microphone according to Claim 2, in which the apertures in the mouthpiece region (1) are in rectangular arrangement and an upstanding member of open-ended hollow rectangular form is provided.

40

6. A microphone according to Claim 2, in which the apertures in the mouthpiece region (1) are in rectangular arrangement and two or more wing-like members are provided, extending from the external surface of the apertured mouthpiece region of the handset to separate the central and outer apertured regions.

45

7. A microphone according to any preceding claim, adapted to be secured in contact with the internal surface of the apertured mouthpiece region (1) of the handset by an adhesive or by clamping means, said clamping means optionally comprising one or more clips or threaded fasteners, said threaded fasteners, when employed, optionally being adapted to be passed through one or more of the apertures in the apertured mouthpiece region of the handset.

50

55

8. A microphone according to Claim 1, in which a seal of a suitably shaped compliant material is provided for location between the microphone and the apertured mouthpiece region of the handset.


60

9. A microphone according to Claim 8, in which said compliant material comprises a rubber or plastics material.

65

10. A microphone according to Claim 1, in which the said cavity is of hollow cylindrical form and located concentrically with the housing which is also substantially cylindrical in shape.

0276996

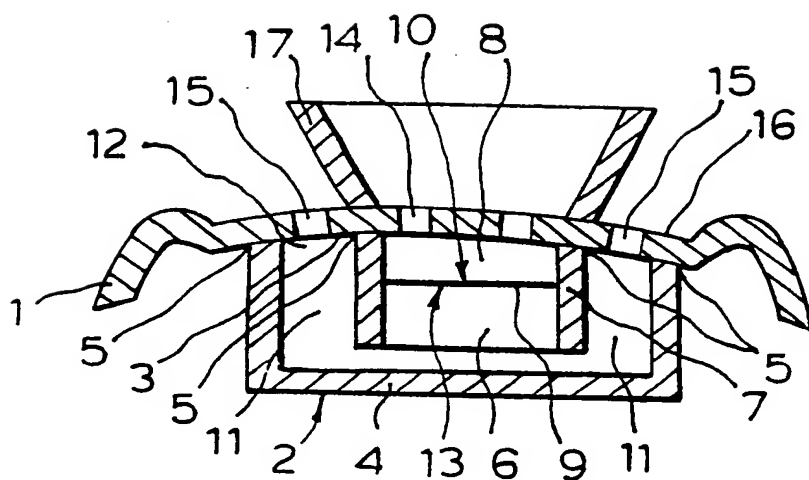

THIS PAGE BLANK (USPTO)

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 276 996
A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 88300686.8

(51) Int. Cl.⁴ H04R 1/22

(22) Date of filing: 27.01.88

(30) Priority: 29.01.87 GB 8702037

(43) Date of publication of application:
03.08.88 Bulletin 88/31(84) Designated Contracting States:
AT DE FR IT SE(86) Date of deferred publication of the search report:
23.11.89 Bulletin 89/47


(71) Applicant: CRYSTALATE ELECTRONICS
LIMITED
Wharf House Medway Wharf Road
Tonbridge Kent TN9 1RE(GB)

(72) Inventor: Groves, Ronald John
29 Laughton Road Woodingdean
Brighton Sussex BN2 6QF(GB)
Inventor: Lambell, Keith Trevor
125 The Avenue Aylesford
Maidstone Kent ME20 7RQ(GB)

(74) Representative: Cole, Paul Gilbert et al
HUGHES CLARK & CO. 63 Lincoln's Inn
Fields PO Box 22
London WC2A 3JU(GB)

(54) Microphone.

(57) A noise cancelling microphone (2) for location inside an apertured mouthpiece region (1) of a telephone handset comprises a housing (4) with a face (5) for securement in contact with the inside of the mouthpiece region (1). A cavity (6) accommodates a vibratable diaphragm (9). A first sound path is provided to a front surface (10) of the diaphragm (9) by way of an opening (8) in a central region of the face (5) of the housing and apertures (14) in a central portion of the mouthpiece region (1) of the handset. A second sound path, physically separated from the first, is provided to a rear surface (13) of the diaphragm by way of an opening (12) in an outer region of the face (5) of the housing and apertures (15) in an outer portion of the mouthpiece region (1). The separated sound paths are extended by securing an upstanding member (17), such as a hollow truncated cone, externally on the mouthpiece region (1) to separate the central (14) and outer (15) apertures.

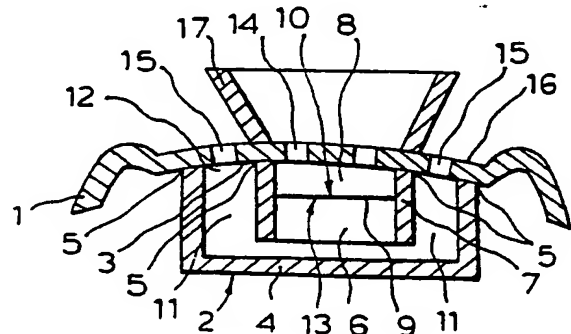

EP 0 276 996 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 88 30 0686

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
X	US-A-4 463 222 (PORADOWSKI) * Column 1, lines 12-29; claims 1,2; figures 1,2 *	1	H 04 M 1/19 H 04 R 1/22
A	* Column 2, lines 17-25; column 3, lines 3-8 *	4,5,7,8	
Y		2,3,6, 10	
Y	FR-A- 517 422 (MIESSNER) * Page 2, lines 58-80; figure 1 *	2,3,6, 10	
			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
			H 04 R H 04 M
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 08-09-1989	Examiner VANDEVENNE M.J.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)